

COIL SPECIFICATION



ZenithTek

Brand

ZenithTek

Product Series Code


ZADH-8030MES-Series

File Version

V1.2-1

Description

SMD Low Profile Magnetic Epoxy Inductor



Features

- High Rated Current.
- Low DC Resistance.
- A Series of Package Size and Wide Inductance Range.
- Halogen Free, Lead Free, RoHS and REACH Compliance.

Applications

- DC to DC Converter.
- Computing, Mobile, Networking.
- IoT, Gaming, Audio Devices.
- Industrial PC, Storage Devices.


Product Identification

ZADH - 8030 ME S - 1R0 M/N
 1 2 3 4 5 6

- 1.Product Code:
ZADH = ZenithTek Code.
- 2.Dimension Code:
8030 = 8.00 * 8.00 * 3.00mm.
- 3.Type Code:
ME = Magnetic Epoxy Type.

- 4.Material Code:
S = Material.
- 5.Inductance Code:
1R0 = 1.0μH.
- 6.Tolerance Code:
M = 20%.
N = 30%.


Dimension (Unit: mm)

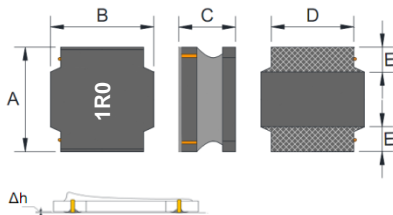

Δh: Clearance between terminal and the surface of plate must be 0.1mm max when coil is placed on a flat plate.

Type	A(±0.2)	B(±0.2)	C(Max.)	D(Ref.)	E(Ref.)
ZADH-8030	8.00±0.3	8.00±0.3	3.00	6.30	2.00

Land Pattern (Unit: mm)




Type	A(Ref.)	B(Ref.)	C(Ref.)	D(Ref.)
ZADH-8030	6.00	7.50	2.20	3.80


Product Structure



Schematic



Reflow Heat Endurance

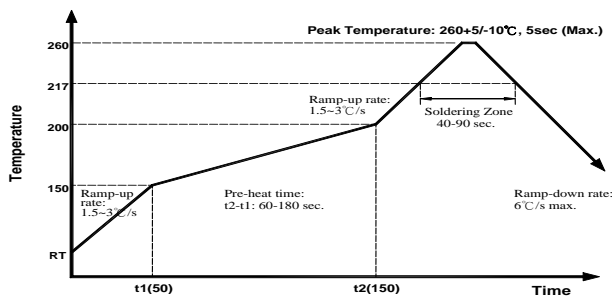

Operating & Storage Conditions

Operating Temp. : -40°C~+125°C (including self-temp. rise)
 Storage Temp. : -40°C~+125°C (for PCBA)

Standard & Atmospheric Conditions

Ambient Temp. : 20°C±15°C / Relative Humidity : 65±20%.
 If there may be any doubt on the result, measurement shall be made within the following limits :
 Ambient Temp. : 25°C±5°C / Relative Humidity : 75±10%.

Test Equipment

LCR Meter : WK-3260B / DC Source : WK-3265B.
 Micro ohm Meter : HIOKI-RM3545.
 Caliper : Mitsutoyo 150mm.

COIL SPECIFICATION



ZenithTek

Brand

ZenithTek

Product Series Code


ZADH-8030MES-Series

File Version

V1.2-1

Description

SMD Low Profile Magnetic Epoxy Inductor



Electrical Characteristic

Part Number	Inductance (μH)	Tolerance (%)	Test Frequency (KHz)/(1V)	SRF(MHz) (Min.)	DCR (Ω)/(Max.)	DCR (Ω)/(Typ.)	Saturation Current (Isat) (A)/(Max.)	Saturation Current (Isat) (A)/(Typ.)	Temperature Current (Irms) (A)/(Max.)	Temperature Current (Irms) (A)/(Typ.)
ZADH-8030MES-1R0□	1.00	30	100	120	0.012	0.009	7.80	9.00	6.20	7.30
ZADH-8030MES-1R5□	1.50	30	100	80	0.016	0.012	6.20	7.60	5.30	6.20
ZADH-8030MES-2R2□	2.20	20	100	60	0.020	0.015	4.90	6.30	4.80	5.70
ZADH-8030MES-3R3□	3.30	20	100	50	0.025	0.019	4.20	5.10	4.30	5.10
ZADH-8030MES-4R7□	4.70	20	100	40	0.029	0.022	3.60	4.30	4.00	4.70
ZADH-8030MES-6R8□	6.80	20	100	32	0.038	0.029	3.00	3.50	3.40	3.90
ZADH-8030MES-100□	10	20	100	27	0.043	0.033	2.40	2.80	3.00	3.70

Note 1: Tolerance Code: M= ±20%, N= ±30%.

Note 2: Definition of saturation current (Isat): DC current at which the inductance drops approximate 30% from its value without current.

Note 3: Definition of temperature rise current (Irms): DC current that causes the temperature rise (ΔT =40°C) from 20°C ambient.

Note 4: The part temperature (ambient + temp. rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should verified in the end application.

COIL SPECIFICATION



ZenithTek

Brand

ZenithTek

Product Series Code


ZADH-8030MES-Series

File Version

V1.2-1

Description

SMD Low Profile Magnetic Epoxy Inductor



Reliability Test

No.	Item	Specification	Test Method
1	Temperature Shock.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Temperature: $-40\pm 2^{\circ}\text{C} \sim +125\pm 2^{\circ}\text{C}$ Kept for 30 minutes. Transition time : 5 minutes. 100 Cycles.
2	Humidity Resistance.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Temperature: $40\pm 2^{\circ}\text{C}$. Relative Humidity: 90%. Duration: 500 +4/-0 hours.
3	High Temperature Resistance.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Temperature: $125\pm 2^{\circ}\text{C}$. Duration: 1000 +4/-0 hours.
4	Low Temperature Resistance.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Temperature: $-40\pm 2^{\circ}\text{C}$. Duration: 1000 +4/-0 hours.
5	Vibration test.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Oscillation Frequency: 10Hz to 55Hz to 10Hz in 60 seconds as a period. Total amplitude: 1.5mm. Testing Time: a period of 2 hours in each 3 mutually perpendicular directions (total of 6 hours).
6	Solderability Heat test.	Appearance: No damage. Inductance: within $\pm 10\%$ of initial.	Solder temperature: $260 +0/-5^{\circ}\text{C}$. Duration: 5 sec. Allowed reflow time: 2 times.
7	Solderability test.	90% or more of electrode area shall be coated by new solder.	Preheating: 160°C , 60sec. Solder temperature: $245\pm 5^{\circ}\text{C}$. Duration : 5 sec.
8	Flexure Strength.	No visible mechanical damage.	Flexure: 2mm. Pressurizing Speed: 0.5mm/sec. Keep time: 30 ± 1 sec.
9	Terminal Strength.	No visible mechanical damage.	Reflow 2 times. Force: 10N , Keep time: 5 sec , X,Y directs.

COIL SPECIFICATION



ZenithTek

Brand

ZenithTek

Product Series Code


ZADH-8030MES-Series

File Version

V1.2-1


Description

SMD Low Profile Magnetic Epoxy Inductor




Package

Taping Dimension (mm)

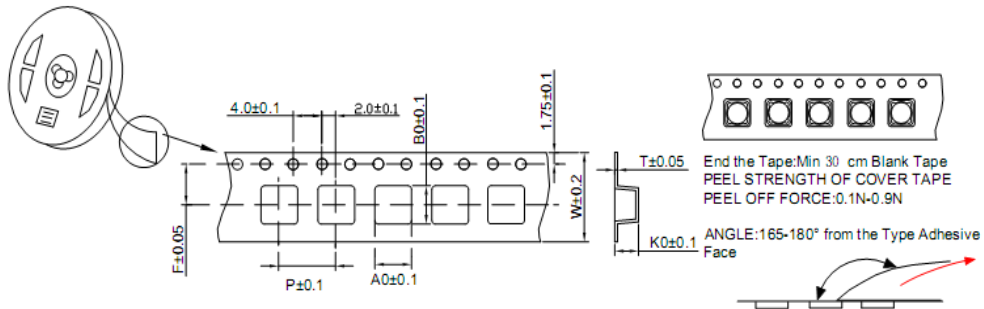

Size(mm)	W	P	A0	B0	K0	T	F
ZADH-8030	16.00	12.00	8.35	8.35	3.40	0.40	7.50

Reel Dimension (mm)

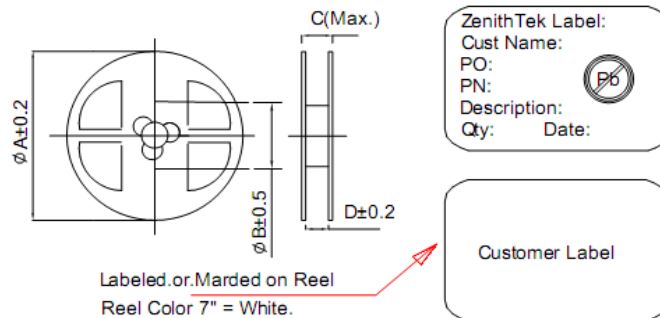

Size(mm)	A	B	C	D	Reel/Size	Qty/Size
ZADH-8030	330	100	20.8	16.4	13"	1500 Pcs

Box Dimension (mm)

